


CURRENT TRANSFORMER

1. DRAWING

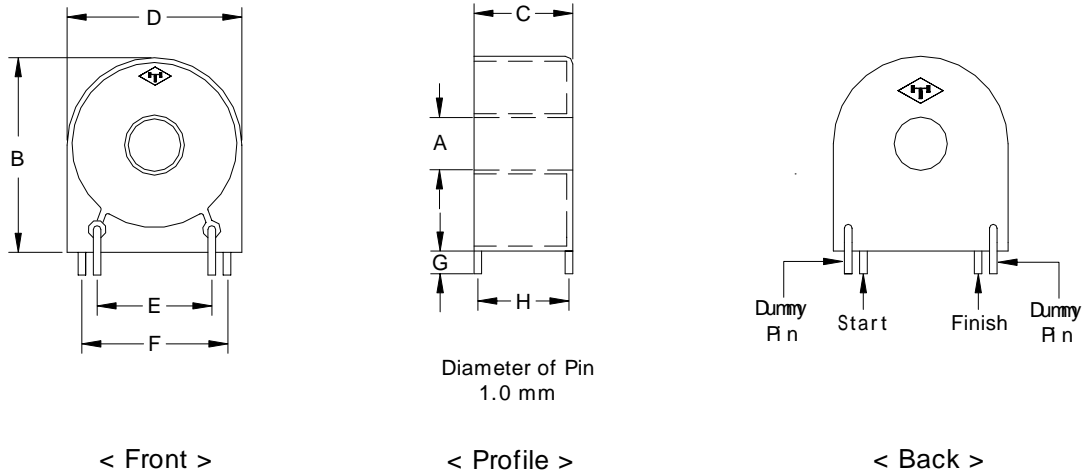

2. DIMENSION

(Unit : mm/inch)

A (MIN)	B (MAX)	C (MAX)	D (MAX)	E (±0.3)	F (±0.3)	G (±0.5)	H (±0.3)
8.9	27.5	17.0	25.2	15.1	19.1	3.0	15.1
0.350~	1.083~	0.670~	0.992~	0.594~	0.752~	0.118~	0.594~

3. ELECTRICAL PROPERTIES

Standard Accuracy	0.2 Class (Meter 0.5 Class)	DC Resistance	182 ~ 192
Turn Ratio	1 : 2,500	Frequency	50Hz / 60Hz
High Potential Voltage	a.c 4.5 KV / Min	Max Current	90A (At 20)
Safty Certificate	TUV, UL	International Standard	Conforming to IEC62053-22
General Application	0.2 / 0.5 Class Indirect connected watt hour meter		

4. TESTING VALUE

5A / 2mA		30A / 12mA	
Ratio Error (%)	Phase Shift (min)	Ratio Error (%)	Phase shift (min)
± 0.1	5 ± 5	± 0.1	4 ± 3



HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

Email:sales@shiruitech.com TEL:+0086-55165232650